

FUNDING DETAIL:

SERVICE REQUEST

SHEET 1 OF 1

LABOR (TIME-SHEET)

INDEX CODE: PWPS31CIP

PROJ/PROJ DET: PWT130-0230

MATERIALS (NON-LABOR)

INDEX CODE: PWCIPBB

PROJ/PROJ DET: PWT130-0230

ENGINEERING
BUREAU

SR #: 526536

INVESTIGATOR: KR

NEW:

MAINT:

DATE: _____

LOCATION: BROADWAY AND MIRA MAR AVENUE

PRIORITY: RUSH:

EXPEDITE:


NORMAL:

- 1 INSTALL NEW W11-2(30x30) & W16-7P(24x12) YELLOW-GREEN SIGNS (2-SIDED).
INSTALL NEW 2-SIDED RECTANGULAR RAPID FLASHING BEACON/ ASSEMBLY.
- 2 INSTALL TRIANGULAR YIELD LINE. INSTALL R1-5a(18x24).
- 3 INSTALL NEW 10-FT CROSSWALK STRIPING. ALIGN 1.5-FT OFF OF
MIRA MAR CURB-FACE.

NOTE: RRFB EQUIPMENT WILL BE PROCURED BY TRAFFIC ENGINEERING.
STRIPING SHALL BE COMPLETED IN THERMOPLASTIC(WHITE).



NO SCALE

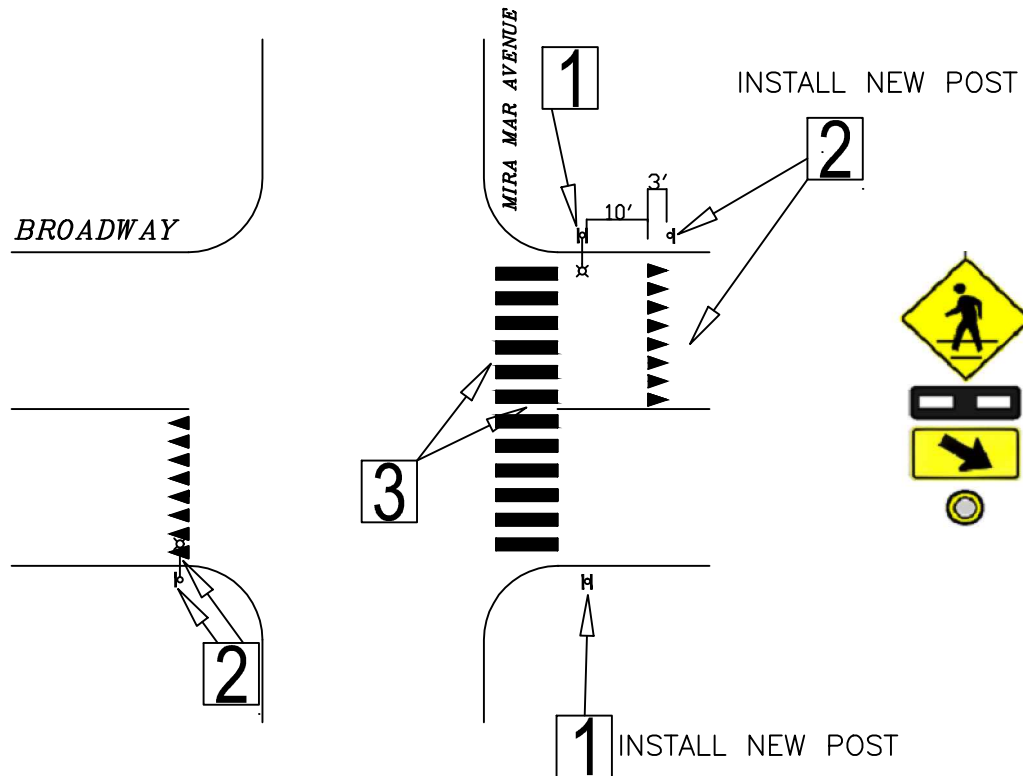

CITY OF LONG BEACH
DEPARTMENT OF PUBLIC WORKS

APPROVED BY: _____
CITY TRAFFIC ENGINEER